

TRAILER-MOUNTED BOOMS




5533 A

Access on the move

- Hydraulic outriggers and automatic leveling allow operation in under 30 seconds
- Superior combination of industry leading capacity and outreach
- Can be towed by a standard half-ton pickup truck - No commercial driver's license needed

Exceptional productivity

- Air / water lines and 110V GFI protected power to the platform

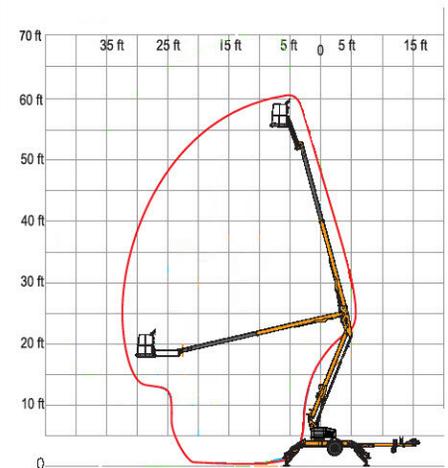

Haulotte 
GROUP

www.haulotte-usa.com



5533 A



TRAILER-MOUNTED BOOM

TECHNICAL DATA

5533 A

| | |
|--|-----------------------|
| Working height | 61 ft 3 in |
| Platform height | 55 ft 3 in |
| Horizontal outreach (from centerline) | 33 ft 5 in |
| Horizontal outreach (from edge of footpad) | 27 ft 4 in |
| Up and over height | 23 ft 1 in |
| Lift capacity | |
| A - Length - stowed | 23 ft 8 in |
| B - Width stowed | 5 ft 7 in |
| C - Height stowed | 6 ft 9 in |
| D x E - Platform size | 4 ft 1 in x 2 ft 9 in |
| F - Widest Point | 14 ft 8 in |
| G - Widest Point | 15 ft |
| Turntable rotation | 350° non-continuous |
| Jib - length | 4 ft 3 in |
| Jib - Vertical Motion | 150° (+70 / -80) |
| Tow speed rating | 65 mph |
| Leveling capability | 12.5 ° |
| Tire size | ST 225/75 R15 |
| Power source | 4 x 6 V 245 amp- |
| Tongue weight (no options) | 335 lbs |
| Weight (no options) | 4800 lbs |

STANDARD EQUIPMENT

- Hydraulic outriggers
- Tilt alarm/sensor
- Hour meter and battery condition indicator
- Automatic leveling system and self-leveling platform
- 110V GFI protected outlet to platform
- Easy to use controls
- Air and water line to platform
- Inboard 25 amp charger
- Integrated forklift pockets
- Hydraulic surge brakes (trailer)

OPTIONS & ACCESSORIES

- Spare tire and mounting kit
- DC / Gas hybrid
- Manual platform rotator - 120° stop point to stop point
- Flashing beacon
- Fluorescent tube caddy
- Combination hitch
- Tool tray
- Electric brakes (trailer)
- Drive and Set

